

Auger Bagger

4198 Weighmaster II

- Auger feeder
- Gross weigh
- Scale-beam or load-cell

CONTAINERS:

- Open mouth bags
- Pails • Drums
- Lined boxes

MATERIALS:

- Powders • Granules
- Bakery flours and blends
- Spice blends • Dairy powders
- Sands and cement blends • Chemicals
- Plastic resins
- Feed supplements

DESIGN FEATURES

- Standard units: with load cells and electronic controls. With scale beam.
- Speeds up to (8) 50 lb bags per minute
- Accuracy of $\pm 1/4\%$ (load cells) or $\pm 1/2\%$ (scale beam) obtainable with good product flow and consistent bulk density.
- 20-110 lb weight range on bags. 50-220 lb on drums.
- Available with #304 or #316 stainless steel with food-grade welding and polish (when required) on all contacting surfaces.
- All electronic scale component parts meet handbook 44 specifications.



MODEL 4198

CONVEYING | PACKAGING | PALLETIZING



CHANTLAND



M H S

Material Handling Solutions


515.332.4045 | chantland.com

Call us... or search 'Chantland MHS' on YouTube to learn more!

4198 WEIGHMASTER II

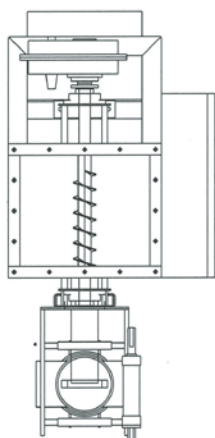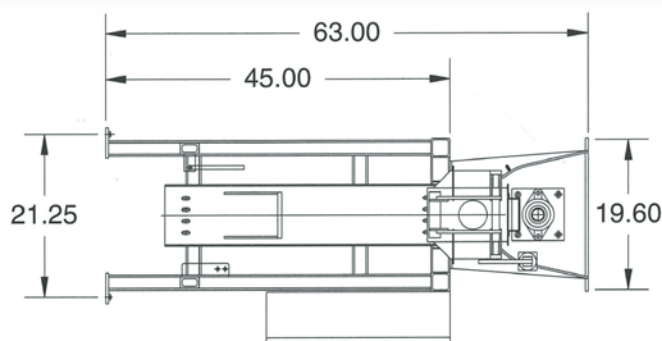

NOTE: Specifications subject to change without notice

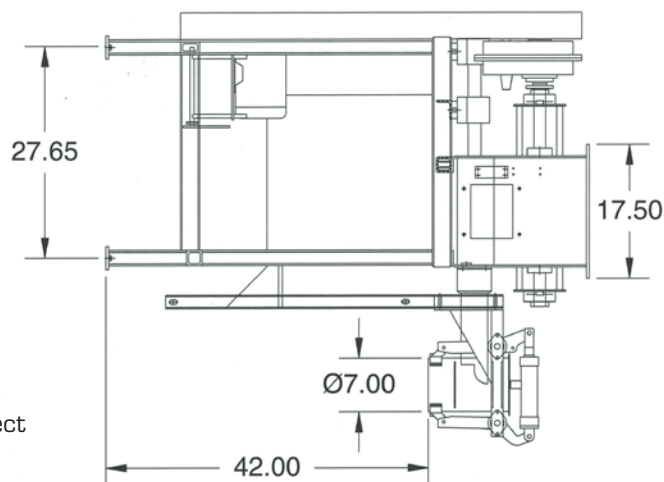

STANDARD SPECIFICATIONS:

- CONSTRUCTION: heavy gauge carbon steel with one coat industrial primer and one coat enamel paint
- MOTOR: 5 hp TEFC - 1750 rpm designed for frequent starts
- Scale beam weighing on hardened knife edge pivots with sensing switch cut-off
- ELECTRICAL: NEMA 12
- Air-operated bag clamps with no-bag, no-dump interlock
- Clean out door with safety switch
- Dust collector connection

NOTE: testing may be required to determine obtainable speeds and accuracies on your product.

OPTIONS:

- T304 stainless steel on contacting surfaces
- PAINT: white urethane or stainless steel
- Feeder ribbon or spiked agitator in primary hopper for sluggish materials
- Hard-faced auger for abrasive materials
- Two-stage bulk and dribble feed for increased accuracies
- Load cell weighing with two-stage digital controller
- ELECTRICAL: NEMA 4 (water tight), NEMA 9 explosion proof (dust)
- Food grade construction including drain plug, air purge packing gland, and no. 4 b polish
- Drum holding cradle attachment
- UTILITY REQUIREMENTS:
 - Electrical: 220/440 volts, 3 ph, 60 hz
- SHIPPING WEIGHT: 1,020 lbs
- CRATE DIMENSIONS: 4'w x 6' l x 6' h

"Build quality equipment, and back it up." — Al Chantland